


# STATIONARY CONCRETE PUMPS SEPARATE PLACING BOOMS

Overview

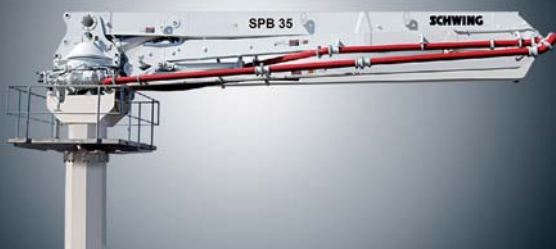

# CONTENTS

## STATIONARY CONCRETE PUMPS

06 | 07 SP 305

08 | 09 SP 500

10 | 11 SP 750

12 | 13 SP 1400

14 | 15 SP 1800

16 | 17 SP 2800

18 | 19 SP 3800

20 | 21 SP 4800

22 | 23 SP 8800

## SEPARATE PLACING BOOMS

24 | 25 SBP 28

26 | 27 SBP 30

28 | 29 SBP 35





CONCRETE BATCHING PLANTS



TRUCK MIXERS



TRUCK-MOUNTED CONCRETE PUMPS



STATIONARY CONCRETE PUMPS



SEPARATE PLACING BOOMS



CONCRETE RECYCLERS

## SCHWING-STETTER MOVES CONCRETE. **WORLDWIDE.**

Wherever concrete is produced and moved is where you will find Schwing-Stetter machinery.

With plants in Germany, Austria, USA, Brazil, Russia, China and India as well as with more than 100 sales and service facilities, the group of companies is always close to the customer.

Our wide range of products with something for every application is what makes Schwing-Stetter the No. 1 system supplier for concrete machinery worldwide.



## TECHNICAL DATA

		SP 305
<b>Type</b>		D-125 x 750
<b>Performance</b>		
Output	m <sup>3</sup> /h	23
Pressure	bar	43
Strokes	/min	40
Installed output	kW	35
Weight, approx.	kg	1,525

*Performance data is max. theoretical  
(Max. output and max. pressure cannot be achieved simultaneously.)*



## TECHNICAL DATA

		SP 500
<b>Type</b>		D-150 x 1000
<b>Performance</b>		
Output	m <sup>3</sup> /h	35
Pressure	bar	76
Strokes	/min	32
Installed output	kW	54
Weight, approx.	kg	2,270

*Performance data is max. theoretical  
(Max. output and max. pressure cannot be achieved simultaneously.)*



### TECHNICAL DATA

		SP 750	
Type		D-180 x 1000	D-150 x 1000
Performance			
Output	m <sup>3</sup> /h	54	38
Pressure	bar	76	76
Strokes	/min	35	35
Installed output	kW	75	75
Weight, approx.	kg	3,340	3,160

*Performance data is max. theoretical  
(Max. output and max. pressure cannot be achieved simultaneously.)*

**TECHNICAL DATA**

		SP 1400
<b>Type</b>		D-180 x 1400
<b>Performance</b>		S / K
Output	m <sup>3</sup> /h	52 / 34
Pressure	bar	63 / 99
Strokes	/min	24 / 16
Installed output	kW	75
Weight, approx.	kg	3,600

*S = rod sided, K = piston sided*

*Performance data is max. theoretical  
(Max. output and max. pressure cannot be achieved simultaneously.)*



### TECHNICAL DATA

		SP 1800	
Type		D-200 x 1600	E-200 x 1600
Performance		S / K	S / K
Output	m <sup>3</sup> /h	73 / 42	73 / 42
Pressure	bar	60 / 108	60 / 108
Strokes	/min	24 / 14	24 / 14
Installed output	kW	74 / 126	75 / 90
Weight, approx.	kg	4,000	4,000

*S = rod sided, K = piston sided*

*Performance data is max. theoretical  
(Max. output and max. pressure cannot be achieved simultaneously.)*



### TECHNICAL DATA

		SP 2800	
Type		D-200 x 1600	E-200 x 1600
Performance		S / K	S / K
Output	m <sup>3</sup> /h	101 / 58	101 / 58
Pressure	bar	60 / 108	60 / 108
Strokes	/min	33 / 19	33 / 19
Installed output	kW	129	110 / 132
Weight, approx.	kg	5,000	5,000

*S = rod sided, K = piston sided*

*Performance data is max. theoretical  
(Max. output and max. pressure cannot be achieved simultaneously.)*



## TECHNICAL DATA

		SP 3800			
Type		D-200 x 2000	E-200 x 2000	D-180 x 2000	E-180 x 2000
Performance		S/K	S/K	S/K	S/K
Output	m <sup>3</sup> /h	95/58	95/58	78/48	78/48
Pressure	bar	81/137	81/137	100/169	100/169
Strokes	/min	26/16	26/16	26/16	26/16
Installed output	kW	190	160	190	160
Weight, approx.	kg	7,000	7,000	7,000	7,000

*S = rod sided, K = piston sided*

*Performance data is max. theoretical  
(Max. output and max. pressure cannot be achieved simultaneously.)*



## TECHNICAL DATA

		SP 4800		
Type		D-200 x 2000	D-180 x 2000	E-180 x 2000
Performance		S/K	S/K	S/K
Output	m <sup>3</sup> /h	81 / 53	66 / 43	66 / 43
Pressure	bar	104 / 163	156 / 243	156 / 243
Strokes	/min	21 / 14	21 / 14	21 / 14
Installed output	kW	330	330	200
Weight, approx.	kg	8,000	8,000	8,000

*S = rod sided, K = piston sided*

*Performance data is max. theoretical  
(Max. output and max. pressure cannot be achieved simultaneously.)*



### TECHNICAL DATA

		SP 8800		
Type		D-200 x 2000	D-180 x 2000	E-180 x 2000
Performance		S/K	S/K	S/K
Output	m <sup>3</sup> /h	116 / 77	94 / 63	91 / 60
Pressure	bar	104 / 163	156 / 243	156 / 243
Strokes	/min	31 / 21	31 / 21	30 / 20
Installed output	kW	440	440	2 x 200
Weight, approx.	kg	10,000	10,000	10,000


*S = rod sided, K = piston sided*

*Performance data is max. theoretical  
(Max. output and max. pressure cannot be achieved simultaneously.)*



### TECHNICAL DATA


Type	SPB 28	
Horizontal reach	m	28
Number of arms		4
Pipeline dia.	DN	125
End hose	m	4
Weight	kg	6,600
Optional split boom		yes
Optional counterweight	kg	6,000
max. free-standing height on octo-column (w.o. c/wt)	m	20

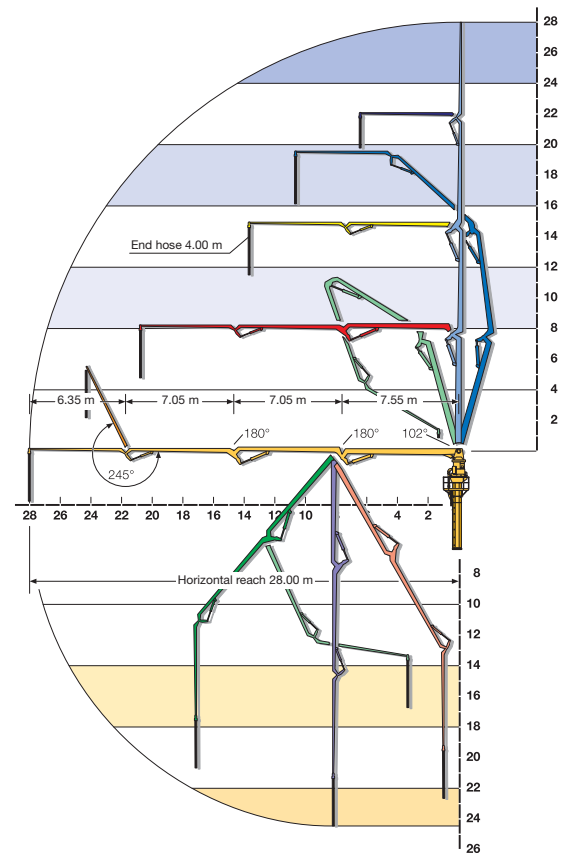



### TECHNICAL DATA


Type	SPB 30	
Horizontal reach	m	30
Number of arms		4
Pipeline dia.	DN	125
End hose	m	4
Weight	kg	6,700
Optional split boom		yes
Optional counterweight	kg	6,000
max. free-standing height on octo-column (w.o. c/wt)	m	20

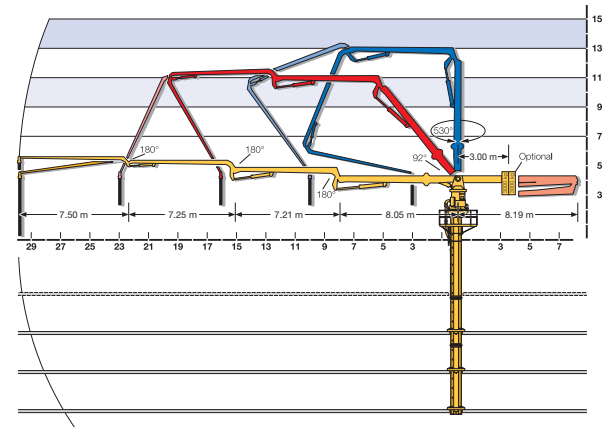



### TECHNICAL DATA

Type	SPB 35	
Horizontal reach	m	35
Number of arms		4
Pipeline dia.	DN	125
End hose	m	4
Weight	kg	8,000
Optional split boom		yes
Optional counterweight	kg	6,000
max. free-standing height on octo-column (w.o. c/wt)	m	14

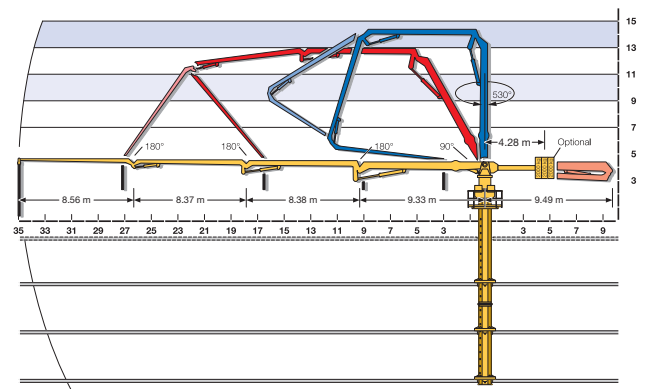





**SCHWING**

SCHWING GmbH | Heerstraße 9-27 | 44653 Herne | T 02325 987-0 | F 02325 72992 | info@schwing.de | www.schwing.de