

# SPB 35

Separate placing boom



Horizontal reach	35 m / 115 ft
Free standing height max.	16 m / 52 ft (without counterweight)
Picking weight max.	4,400 kg / 9,700 lb




RECORD BREAKING ENGINEERING

## SPB 35 Separate placing boom

# Technical data

Designation	SPB 35	
Boom	35 R	
Delivery line	DN 125	
Length of end hose	m	4
Horizontal reach	m	34.70
Vertical reach	m	35.00
Reach depth	m	30.00
Number of boom sections	4	
Slewing range	550°	
free standing height max. (without / with counterweight)	m	16.00 / 22.00
max. component weight (picking weight)	kg / lb	4,400 / 9,700
Total weight (without counter-jib, without mast sections)	kg / lb	8,600 / 18,960
Drive unit power	kW	30 (50 Hz) / 36 (60 Hz)

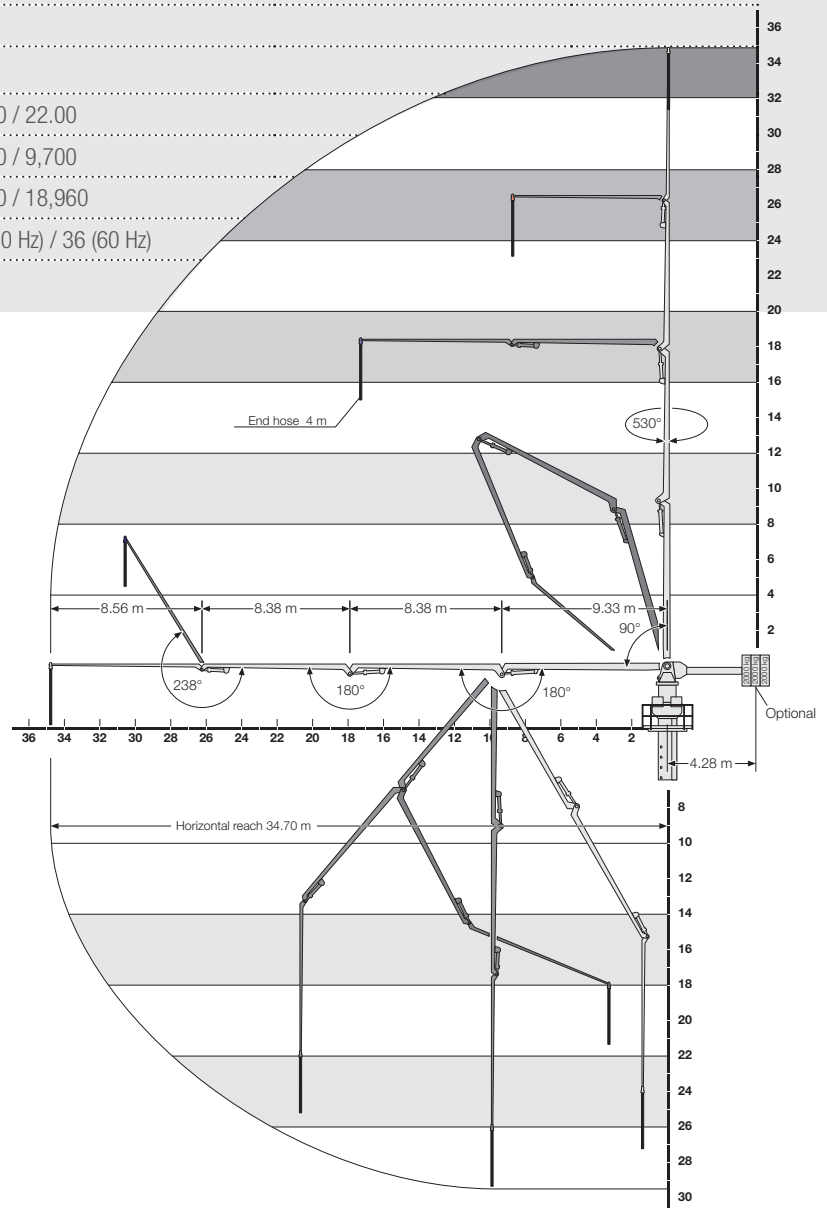

Separate placing booms from SCHWING.  
Outstanding reliability and safety.



**SCHWING**  
**Stetter**

SCHWING GmbH  
Heerstrasse 9-27 · 44653 Herne, Germany  
Fon +49 23 25 - 987-0 · Fax +49 23 25 - 72922  
www.schwing-stetter.com · info@schwing.de

Stetter GmbH  
Dr.-Karl-Lenz-Strasse 70 · 87700 Memmingen, Germany  
Fon +49 83 31 - 78-0 · Fax +49 83 31 - 78 275  
www.schwing-stetter.com · info@stetter.de